

Free Download Of Lead2pass Microsoft 70-980 VCE And PDF Dumps(51-60)

Lead2pass 70-980 exam questions and answers in PDF are prepared by our expert, Moreover, they are based on the recommended syllabus covering all the 70-980 exam objectives. You will find them to be very helpful and precise in the subject matter since all the Microsoft 70-980 exam content is regularly updated and has been checked for accuracy by our team of Microsoft expert professionals.

QUESTION 51


Your network contains an Active Directory domain named contoso.com.
All servers run either Windows Server 2008 R2 or Windows Server 2012.

Your company uses IP Address Management (IPAM) to manage multiple DHCP servers.

A user named User1 is a member of the IPAM Users group and is a member of the local Administrators group on each DHCP server.

When User1 edits a DHCP scope by using IPAM, the user receives the error message shown in the exhibit. (Click the Exhibit button.)

You need to prevent User1 from receiving the error message when editing DHCP scopes by using IPAM.
What should you do?

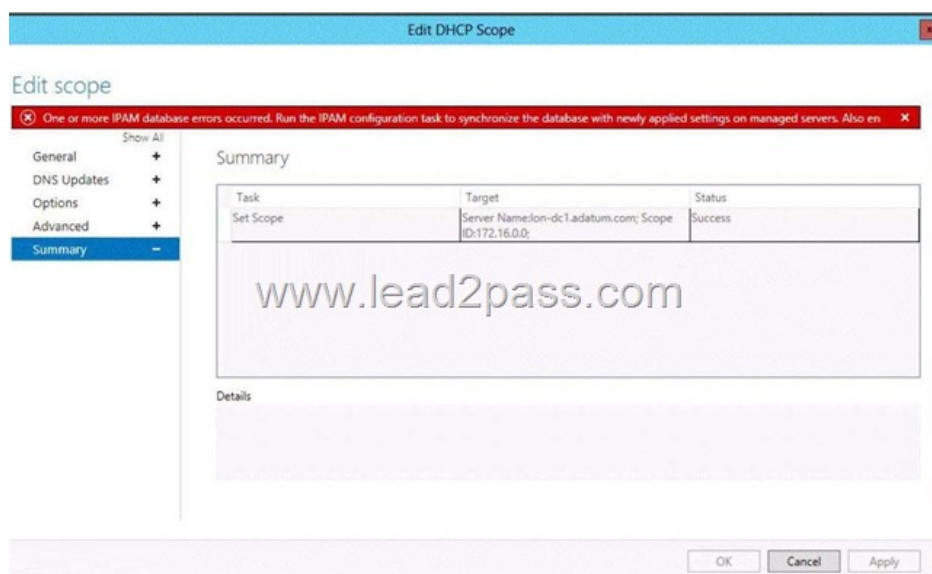

- A. Add User1 to the DHCP Administrators group on each DHCP server.
- B. Add User1 to the IPAM Administrators group.
- C. Run the Set-IPAMServerConfig cmdlet.
- D. Run the Invoke-IPAMGpoProvisioning cmdlet.

Answer: B

QUESTION 52

Your network contains an Active Directory forest named corp.contoso.com.

All servers run Windows Server 2012. The network has a perimeter network that contains servers that are accessed from the Internet

by using the contoso.com namespace.

The network contains four DNS servers.

The servers are configured as shown in the following table.

Server name	Location	Function	DNS zone	Zone type
DC1	Internal network	Domain controller, DNS server	Corp.contoso.com	Active Directory- integrated
DC2	Internal network	Domain controller, DNS server	Corp.contoso.com	Active Directory- integrated
Server1	Perimeter network	DNS server	Contoso.com	Primary
Server2	Perimeter network	DNS server	Contoso.com	Secondary

All of the client computers on the perimeter network use Server1 and Server2 for name resolution.

You plan to add DNS servers to the corp.contoso.com domain.

You need to ensure that the client computers automatically use the additional name servers.

The solution must ensure that only computers on the perimeter network can resolve names in the corp.contoso.com domain.

Which DNS configuration should you implement on Server1 and Server2? To answer, drag the appropriate DNS configuration to the correct location in the answer area. Each DNS configuration may be used once, more than once, or not at all. Additionally, you may need to drag the split bar between panes or scroll to view content.

Configurations

a conditional forwarder

a zone delegation

a stub zone

a subdomain

Answer Area

Server1 Configuration

Server2 Configuration

Answer:

Configurations

a conditional forwarder

a zone delegation

a stub zone

a subdomain

Answer Area

Server1 a stub zone

Server2 a stub zone

QUESTION 53

Your network contains an Active Directory domain named contoso.com.

The domain contains multiple sites.

You plan to deploy DirectAccess.

The network security policy states that when client computers connect to the corporate network from the Internet, all of the traffic destined for the Internet must be routed through the corporate network.

You need to recommend a solution for the planned DirectAccess deployment that meets the security policy requirement.

What should you include in the recommendation?

- A. Set the ISATAP State to state enabled.
- B. Enable split tunneling.
- C. Set the ISATAP State to state disabled.
- D. Enable force tunneling.

Answer: D

QUESTION 54

Your network contains an Active Directory domain.

You plan to implement a remote access solution that will contain three servers that run Windows Server 2012.

The servers will be configured as shown in the following table.

You need to ensure that all VPN connection requests are authenticated and authorized by either Server2 or Server3.

The solution must ensure that the VPN connections can be authenticated if either Server2 or Server3 fails.

What should you do?

Server name	Role service	Location
Server1	Direct Access and VPN (RRAS)	Perimeter network
Server2	Network Policy Server	Internal network
Server3	Network Policy Server	Internal network

- A. On Server1, configure a RADIUS proxy. Add Server2 and Server3 to a failover cluster.
- B. Add Server2 and Server3 to a Network Load Balancing (NLB) cluster. On Server1, modify the Authentication settings.
- C. On Server1, configure a RADIUS proxy. On Server2 and Server3, add a RADIUS client.
- D. On Server2 and Server3, add a RADIUS client. On Server1, modify the Authentication settings.

Answer: D

QUESTION 55

Your company has a main office.

The network contains an Active Directory domain named contoso.com.

The main office contains a server named Server1 that runs Windows Server 2012.

Server1 has the Remote Access server role installed and is configured to accept incoming SSTP-based VPN connections. All client computers run Windows 7.

The company plans to open a temporary office that will contain a server named Server2 that runs Windows Server 2012 and has the DHCP Server server role installed.

The office will also have 50 client computers and an Internet connection.

You need to recommend a solution to provide the users in the temporary office with access to the resources in the main office.

What should you recommend? More than one answer choice may achieve the goal. Select the BEST answer.

- A. Use the Connection Manager Administration Kit (CMAK) to create a connection package that specifies Server1 as the target for SSTP-based VPN connections. Manually distribute the CMAK package to each client computer in the temporary office.

- B. Install the Remote Access server role on Server2. From Routing and Remote Access on Server2, add a SSTP-based VPN port. From DHCP on Server2, configure the default gateway server option.
- C. Uses the Connection Manager Administration Kit (CMAK) to create a connection package that specifies Server1 as the target for SSTP-based VPN connections. Use a Group Policy object (GPO) to distribute the CMAK package to each client computer in the temporary office.
- D. Install the Remote Access server role on Server2. From Routing and Remote Access on Server2, configure a demand-dial interface. From DHCP on Server2, configure the default gateway server option.

Answer: B

QUESTION 56

Your network contains an Active Directory domain named contoso.com.

The domain contains servers that run either Windows Server 2008 R2 or Windows Server 2012. All client computers on the internal network are joined to the domain. Some users establish VPN connections to the network by using Windows computers that do not belong to the domain.

All client computers receive IP addresses by using DHCP.

You need to recommend a Network Access Protection (NAP) enforcement method to meet the following requirements:

- Verify whether the client computers have up-to-date antivirus software.
- Provides a warning to users who have virus definitions that are out-of-date.
- Ensure that client computers that have out-of-date virus definitions can connect to the network.

Which NAP enforcement method should you recommend?

- A. VPN
- B. DHCP
- C. IPsec
- D. 802.1x

Answer: B

QUESTION 57

Your network contains an Active Directory domain named contoso.com.

The domain contains a server named Server1 that runs Windows Server 2012.

Server1 resides in the perimeter network and has the Remote Access server role installed.

Some users have laptop computers that run Windows 7 and are joined to the domain.

Some users work from home by using their home computers.

The home computers run either Windows XP, Windows Vista/ Windows 7, or Windows 8.

You need to configure the computers for remote access.

Which three actions should you perform? To answer, move the three appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Answer Area
Publish the connection files to a web site in the company's extranet.	
Publish a software deployment package by using a Group Policy object (GPO).	
Create a RemoteApp application package.	
Create a Connection Manager Administration Kit (CMAK) package.	
Install the Connection Manager Administration Kit (CMAK).	

Answer:

Actions	Answer Area
Publish the connection files to a web site in the company's extranet.	Install the Connection Manager Administration Kit (CMAK).
Publish a software deployment package by using a Group Policy object (GPO).	Create a Connection Manager Administration Kit (CMAK) package.
Create a RemoteApp application package.	
Create a Connection Manager Administration Kit (CMAK) package.	Publish the connection files to a web site in the company's extranet.
Install the Connection Manager Administration Kit (CMAK).	

QUESTION 58

Your network contains multiple servers that run Windows Server 2012.
 All client computers run Windows 8.
 You need to recommend a centralized solution to download the latest antivirus definitions for Windows Defender.
 What should you include in the recommendation?

- A. Microsoft System Center 2012 Endpoint Protection
- B. Network Access Protection (NAP)
- C. Microsoft System Center Essentials
- D. Windows Server Update Services (WSUS)

Answer: D

QUESTION 59

Your network contains an Active Directory domain named contoso.com.
 The domain contains three VLANs.
 The VLANs are configured as shown in the following table.
 All client computers run either Windows 7 or Windows 8.
 The corporate security policy states that all of the client computers must have the latest security updates installed.
 You need to implement a solution to ensure that only the client computers that have all of the required security updates installed can connect to VLAN 1.
 The solution must ensure that all other client computers connect to VLAN 3.
 Which Network Access Protection (NAP) enforcement method should you implement?

VLAN ID	Contents	Routing enabled to
1	Client computers	VLAN 2
2	<ul style="list-style-type: none"> Application servers Domain controllers Network Policy Service (NPS) servers 	VLAN 1 and the Internet
3	Windows Server Update Services (WSUS) server	Nowhere

- A. VPN
- B. DHCP
- C. IPsec
- D. 802.1x

Answer: D

QUESTION 60

You have a server named Server1 that runs Windows Server 2012.

You have a 3-TB database that will be moved to Server1.

Server1 has the following physical disks:

- Three 2-TB SATA disks that are attached to a single IDE controller
- One 1-TB SATA disk that is attached to a single IDE controller

You need to recommend a solution to ensure that the database can be moved to Server1.

The solution must ensure that the database is available if a single disk fails.

What should you include in the recommendation?

- A. Add each disk to a separate storage pool. Create a mirrored virtual disk.
- B. Add two disks to a storage pool. Add the other disk to another storage pool. Create a mirrored virtual disk.
- C. Add all of the disks to a single storage pool, and then create two simple virtual disks.
- D. Add all of the disks to a single storage pool, and then create a parity virtual disk.

Answer: D

Good news, Lead2pass has updated the 70-980 exam preparation material. With all the questions and answers in your hands, you will pass the Microsoft 70-980 exam easily. We make our promise that Lead2pass is your best choice. If you want to get more 70-980 exam preparation material, you can download the free brain dumps in PDF files on Lead2pass. It would be great help for your exam. All the dumps are updated and cover every aspect of the examination.

www.lead2pass.com/70-980.html